

# PRESSURE ACTUATED SHOWER VALVES


## PAM®II-ST-F-LR

1/2" inlets and outlet

### SHOWER OR TUB/SHOWER



PAM  
FLOW CAPACITIES

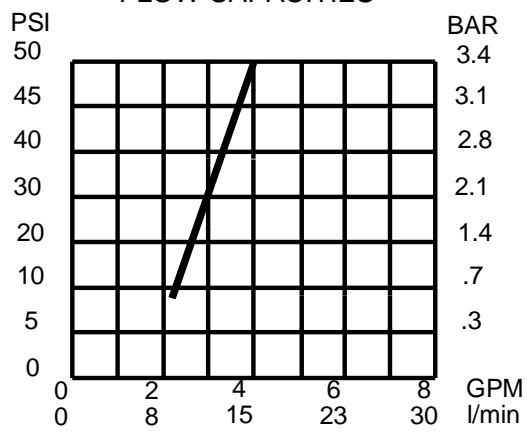

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.Ca.gov](http://www.P65Warnings.Ca.gov)

#### PAM®II-ST-F-LR Pressure Actuated mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and ligature resistant knob, polished chrome plated
- Vandal resistant screws
- Maximum operating pressure: 125 PSIG (860KPA)
- Minimum flow 1.5 GPM (5.7 l/min)
- Adjustable high temperature limit stop set for 110°F\* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- Plaster-guard/thin wall mounting bracket included
- Angle Checkstops, copper tube connection

#### I. "Ligature resistant" disclaimer

**NOTE:** This product has been designed to reduce the likelihood that it can be used as a mechanism for hanging.


#### II. "Not a substitute" disclaimer

This product **IS NOT A SUBSTITUTE** for the evaluation, treatment or appropriate supervision of persons at risk of suicide.

Valve is ASSE 1016 – Type P Certified



PAM-II-ST-F-LR

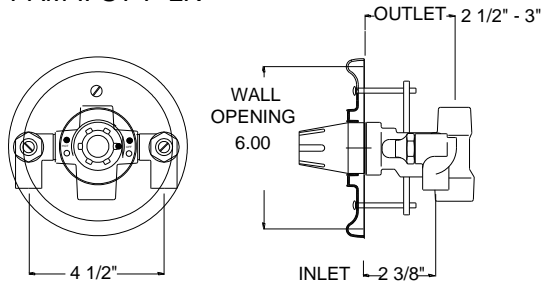

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

<b>Engineer's Approval</b>	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA  
 Phone: 401.461.1200 Fax: 401.941.5310  
 Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
 Web Site: <http://www.leonardvalve.com>