

## PAM®II-ST COMBINATIONS

**51-3D**

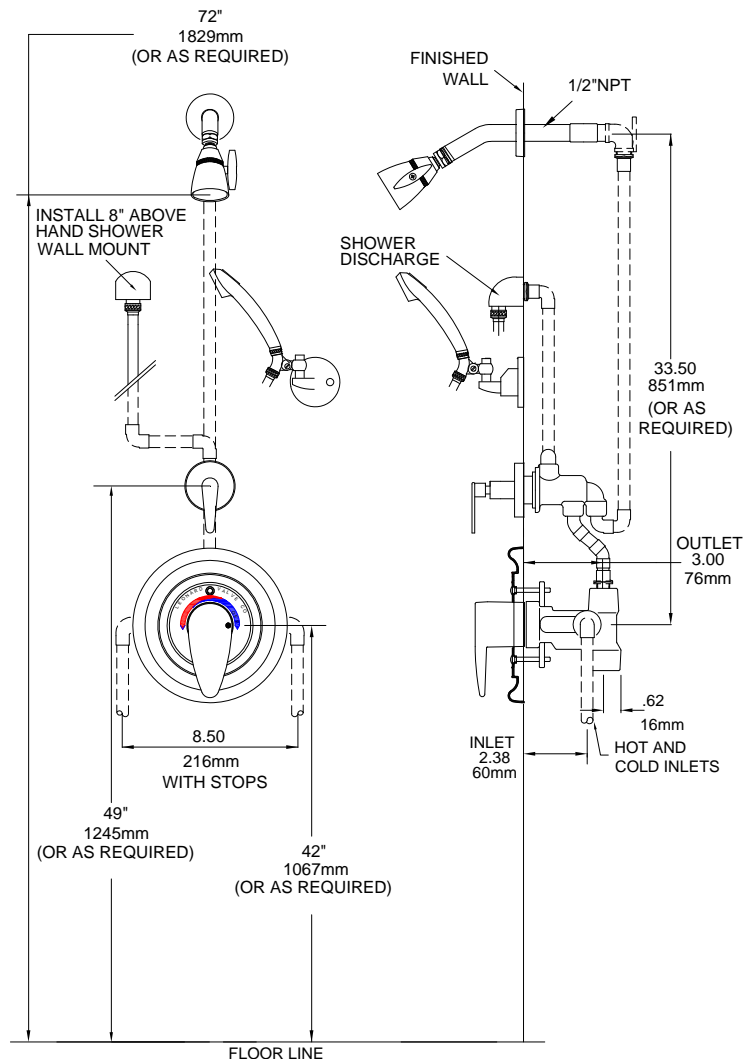

### PAM®II-ST Pressure Actuated Mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F\* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- ½" inlets and outlets
- Angle checkstops, copper tube connection
- Plasterguard/thin wall mounting bracket included.
- H-02 Shower head, ball joint adjustable spray, arm and flange, 2.5 GPM, (9.5l/min)
- D2-L Inline diverter, lever handle
- 500P Hand shower, 2.5 GPM, (9.5l/min), wall hooks, inline vacuum breaker

**ASSE · 1016 Certified**  
**CSA-Certified**


Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.Ca.gov](http://www.P65Warnings.Ca.gov)

<b>Engineer's Approval</b>	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA  
 Phone: 401.461.1200 Fax: 401.941.5310  
 Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
 Web Site: <http://www.leonardvalve.com>