

WALL MOUNTED SHOWER SYSTEMS

surfashower®

HANDICAPPED INSTALLATION

Pressure Actuated

SS-PAM-200/3ISA-D2L/501P(G)-44 COR
SS-PAM-204-D2L/501P(G)-44 COR (Shown)
SS-PAM-H-15-D2L/501P(G)-44 COR

Pressure Actuated Surfashower® Corner Installation

SS-PAM-200/3ISA-D2L/501P(G)-44 COR


- PAM-II, pressure-actuated shower mixer, with integral checkstops, for corner installation.
- Maximum operating pressure: 125 PSIG (860KPA)
- Flexible stainless steel hose in inlets.
- Adjustable high temperature limit stop set for 110°F* (43°C)
- D-2L inline diverter valve
- H-06 institutional shower head, 2.5 GPM (95 l/min.) max.
- 501P(G) hand shower, 2.0 GPM (7.6 l/min) 69" (1753mm) hose, 24" (610mm) glide bar, inline vacuum breaker, supply elbow
- Top cap and bottom cap.

SS-PAM-204- D2L/501P(G)-44 COR

- H-03 adjustable spray ball joint shower head, 2.5 GPM (95 l/min.)
- Cast flanged shower head fitting.

SS-PAM-H-15- D2L/501P(G)-44 COR

- H-15 adjustable spray ball joint shower head, 1.5 GPM (5.7 l/min.)

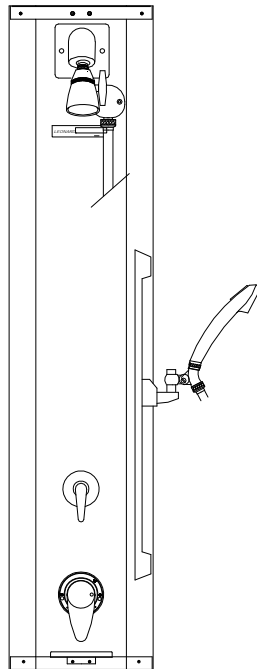

SS-PAM-204-D2L/501P(G)-44 COR

VALVE IS ASSE 1016 LISTED
VALVE IS CSA LISTED



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

OPTIONS:

___SUFFIX VX - Integral stainless steel extension to ceiling, specify length___". See reverse side to calculate VX length

*NOTE: A limit stop, set for 110°F (43°C), is simply a mechanical setting to prevent excessive handle rotation. If incoming water is hotter than 135°F (57°C), the temperature of the factory test, the valve when turned to full HOT may deliver water in excess of 110°F and the limit stop MUST BE RESET BY THE INSTALLER

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____





1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>

PRESSURE BALANCE MODELS

SS-PAM-200/3ISA-D2L/501P(G)-44

SS-PAM-204-D2L/501P(G)-44

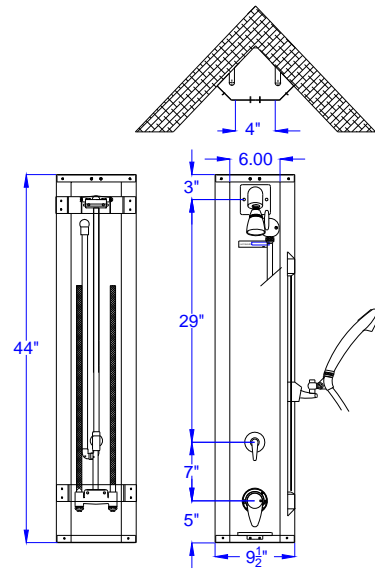
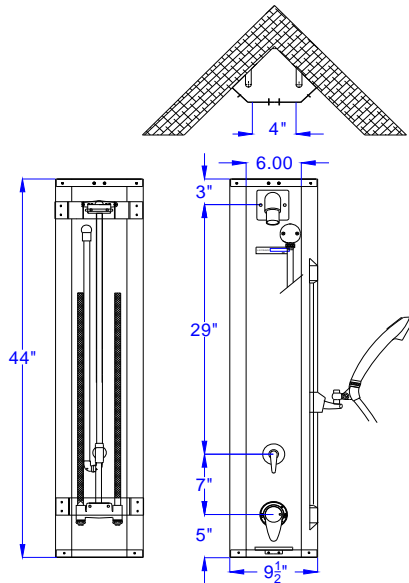


SUFFIX VX
(For 3ISA units)

VX Length:
To Calculate:
VX Length = Ceiling height minus
Shower head height minus
5" (127mm)

SUFFIX VX
(For 204 & H-15units)

VX Length:
To Calculate:
VX Length = Ceiling height minus
Shower head height minus
7 1/2" (191mm)

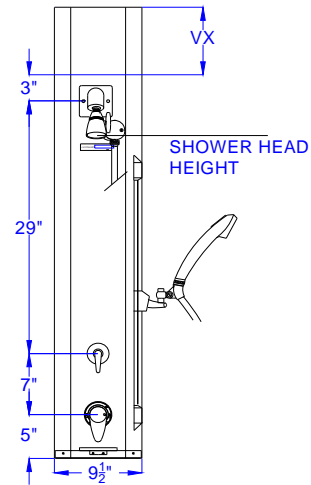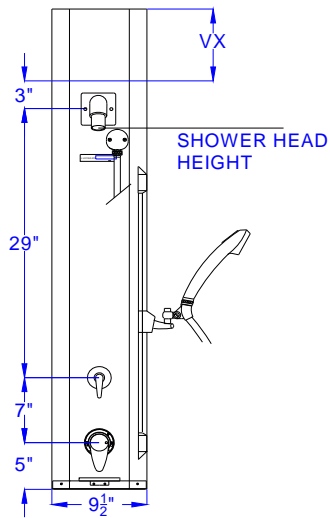

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

***NOTE:** A limit stop, set for 110°F (43°C), is simply a mechanical setting to prevent excessive handle rotation. If incoming water is hotter than 135°F (57°C), the temperature of the factory test, the valve when turned to full HOT may deliver water in excess of 110°F and the limit stop **MUST BE RESET BY THE INSTALLER**



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

WEB: <http://www.leonardvalve.com>