


THERMOSTATIC MIXING VALVE

MODEL 369-LF CABINET ASSEMBLY LEAD FREE THERMOSTATIC POINT OF USE MIXING VALVE

MODEL 369-LF 3/4" inlets, 3/4" outlet (MIPS connections)

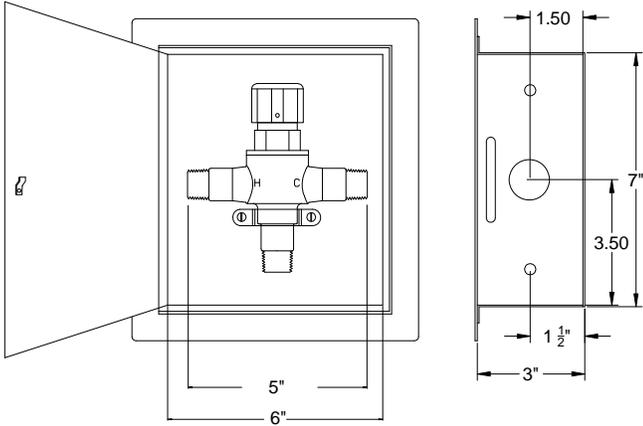

MATERIALS:

- Lead free bronze body
- Locked temperature adjustment cap (vandal resistant)
- Copper encapsulated thermostat assembly with polymer thermoplastic shuttle
- Stainless steel springs, Buna-N O-rings
- Integral check valves on hot and cold inlets
- Recessed cabinet with cylinder lock

PRESSURE-TEMPERATURE:

- Minimum Flow: 1.0 GPM (3.8 l/Min)
- Maximum Pressure: 125 PSI (8.6 BAR)
- Maximum Hot Water temperature: 200°F (93°C)
- Approach Temperature 5°F (2.8°C) above set point.
- Temperature adjustment range, 90-120°F (32-49°C) **

**ABOVE SHOWN WITH
BV AND DT OPTION**

Valve assembly is certified to meet Low-Lead requirements of wetted surface area containing less than 0.25% lead by weight. All other fittings and components, the sum total of which comprise the wetted surface of this product, contain less than one quarter of one percent of lead by weight.

PRESSURE DROP										
5	10	15	20	25	30	35	40	45	50	PSI
0.3	0.7	1.0	1.4	1.7	2.1	2.4	2.8	3.1	3.4	BAR
4.0	5.8	6.8	7.5	8.3	9.0	9.8	10.5	11.3	12.0	GPM
15.1	21.0	25.7	28.4	31.4	34.1	37.1	39.7	42.8	45.4	L/MIN

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____

ASSE 1069 Certified 

OPTIONS:

- ___ SUFFIX STSTL REC- Stainless steel cabinet, #4 finish, recessed
- ___ SUFFIX STSTL EXP- Stainless steel cabinet, #4 finish, exposed
- ___ SUFFIX CP- Chrome plated
- ___ SUFFIX RHH- Right hand hinge (SEE PAGE 2)
- ___ SUFFIX BV-Inlet ball valves (SEE PAGE 2)
- ___ SUFFIX SW- Sweat connections (SEE PAGE 2)
- ___ SUFFIX DT- Dial thermometer (SW option not allowed with DT SEE PAGE 2)



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.




1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>

MODEL 369-LF-_____


CABINET ASSEMBLY

THERMOSTATIC POINT OF USE

MIXING VALVE SHOWN WITH OPTIONS

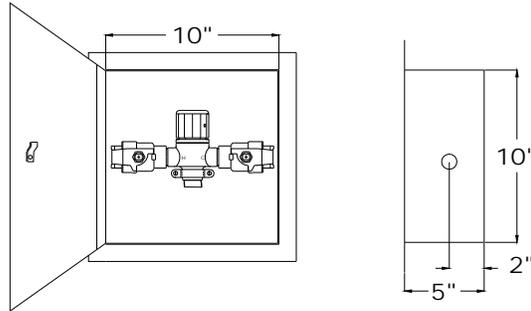

SHOWN WITH OPTION BV

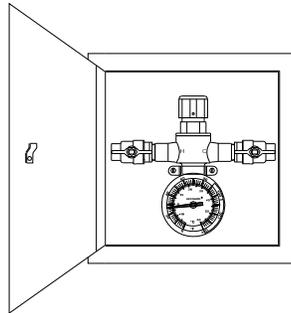

SHOWN WITH OPTION BV & DT

OPTIONS:

- SUFFIX RHH- Right hand hinge
- SUFFIX BV-Inlet ball valves
- SUFFIX SW- Sweat connections
- SUFFIX DT- Dial thermometer (SW option not allowed with DT)

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

****NOTE:** For temperatures outside of this valve's stated range, please see our line of bi-metal valves.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____

CAUTION! All thermostatic water mixing valves have limitations. They will NOT provide the desired accuracy outside of their flow capacity range. Consult the Flow Capacity Chart and DO NOT OVERSIZE. Minimum flow must be no less than as indicated.



1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>