

PAM®II-ST COMBINATIONS

51-5D



PAM®II-ST Pressure Actuated Mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- ½" inlets and outlets
- Angle checkstops, copper tube connection
- Plasterguard/thin wall mounting bracket included.
- D2-L Inline diverter, lever handle
- 500P Hand shower, 2.5 GPM, (9.5l/min), wall hooks, inline vacuum breaker
- TS Tub spout

ASSE · 1016 Certified
CSA-Certified




Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

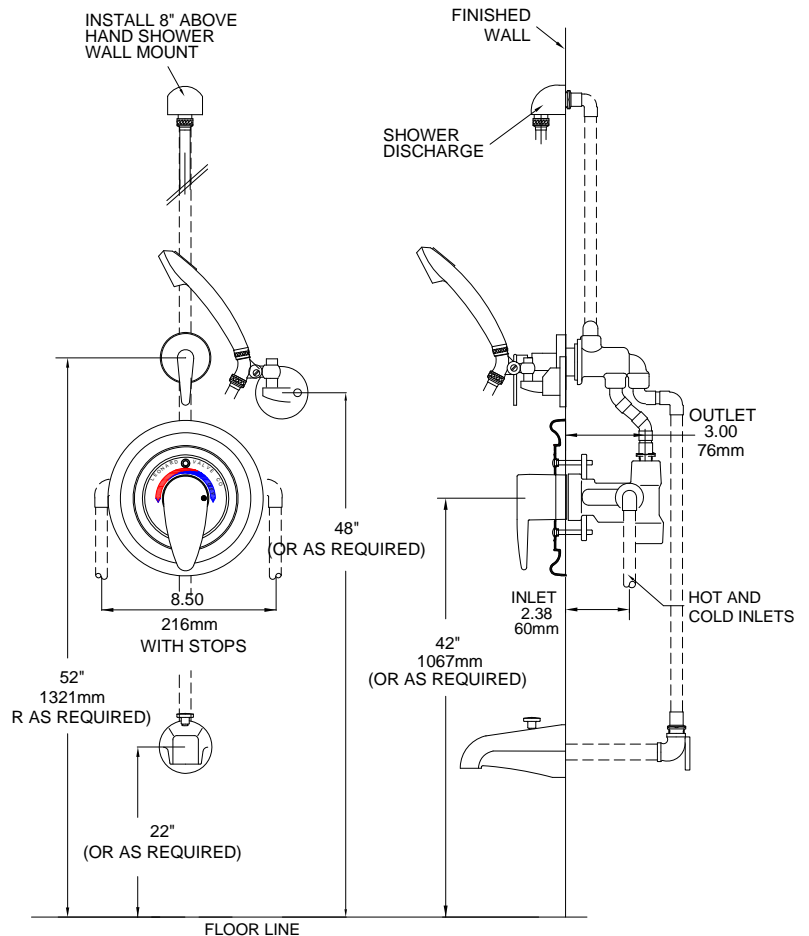

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>