


PRESSURE ACTUATED SHOWER VALVES

PAM®II-E

1/2" IPS TOP INLETS

1/2" IPS TOP OUTLET

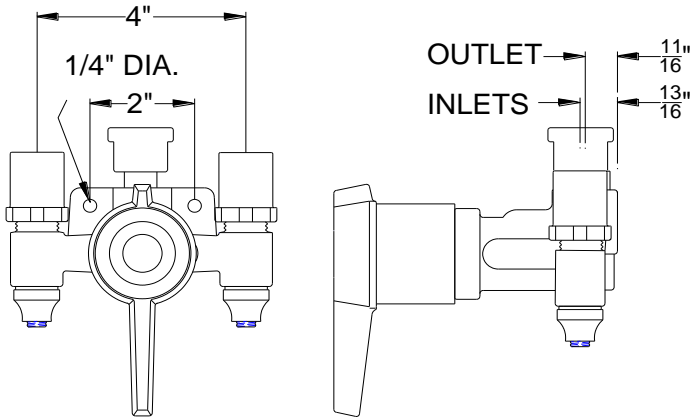

EXPOSED PIPING


__ PAM®II-E Pressure Actuated mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Integral cast wall mounting bracket
- Integral checkstops, with female adapters, top inlets.
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F* (43°C)
- Minimum flow 1.5 GPM (5.7 l/min)
- Color coded dial, Off through Hot, with directional indicators

• Valve is ASSE 1016 – Type P Certified



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

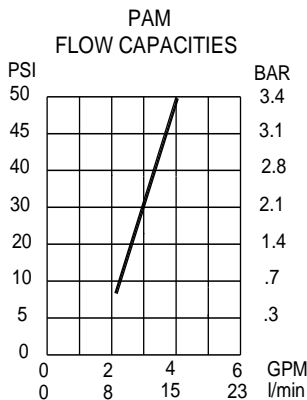

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>