


Thermostatic MIXING VALVES

TM-554-LF Exposed Assemblies

ECO-MIX™

 TM-554-26 LF 3/4" inlets and outlet

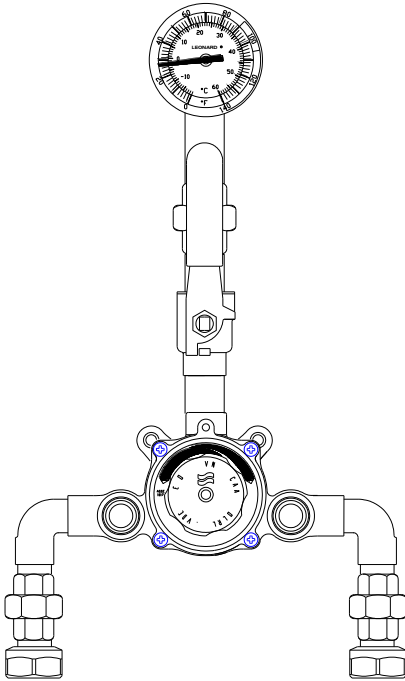

- Thermostatic water mixing valve
- Dura-trol® solid bimetal thermostat directly linked to valve porting to control the intake of hot and cold water and compensate for supply temperature or pressure fluctuations. Dura-trol® is highly responsive and cannot be damaged by extremes in temperature.
- Adjustable high temperature limit stop set for 120° F (49° C) *
- Combination checkstops on inlets, wall support
- Outlet ball valve
- Color coded dial thermometer (0 to 140°F, -10° to 60°C)
- Maximum operating pressure: 125 PSI (860 KPA)
- Factory assembled and tested
- 3/4" threaded inlets and outlet
- 1 GPM (3.7 l/m) minimum flow capacity
- Internal parts of lead free bronze, lead free brass, and stainless steel
- Color-coded dial, HOT-COLD with directional indicators
- Locking temperature adjustment knob
- Rough bronze finish

Valve is ASSE 1017 Certified



Valve is CSA Certified



OPTIONS:

 SUFFIX LWS - Less Wall support

NOTE: CP option is NOT available

Valve assembly is certified to meet Low-Lead requirements of wetted surface area containing less than 0.25% lead by weight. All other fittings and components, the sum total of which comprise the wetted surface of this product contains less than one quarter of one percent of lead by weight.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____

***NOTE:** A limit stop is simply a mechanical setting to prevent excessive handle rotation. If incoming water is hotter than 150°F (65.5°C), the temperature of the factory test, the valve when turned to full HOT may deliver water in excess of 120°F and the limit stop **MUST BE RESET BY THE INSTALLER**




1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>

TM-554-20-26-LF

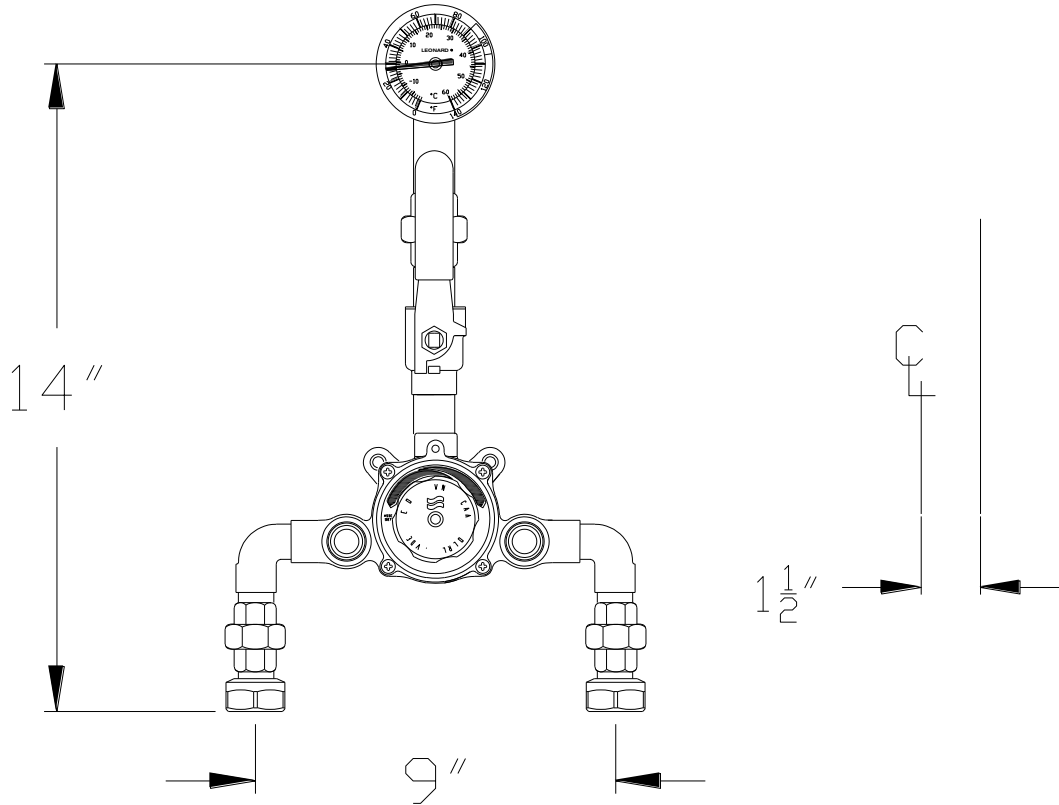

MODEL	IN	OUT	MINIMUM FLOW (GPM) (l/min)	SYSTEM PRESSURE DROP (PSIG)										PSI BAR
				5	10	15	20	25	30	35	40	45	50	
TM-26-LF	3/4"	3/4"	1.0 3.7	7 26	10 38	13 49	15 57	17 64	19 72	21 80	23 87	25 95	26 98	GPM l/min

CAUTION! All thermostatic water mixing valves have limitations. They will NOT provide the desired accuracy outside of their flow capacity range. Consult the Flow Capacity Chart and DO NOT OVERSIZE. Minimum flow must be no less than as indicated.



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>