

HCMS MANIFOLD


HIGH CAPACITY-MULTIPLE STATION

DIGITAL STAINLESS STEEL HOSE

RACK MANIFOLD

0-52 GPM (0-196 l/min)

Submittal Data Sheet HCMS
April 3, 2024

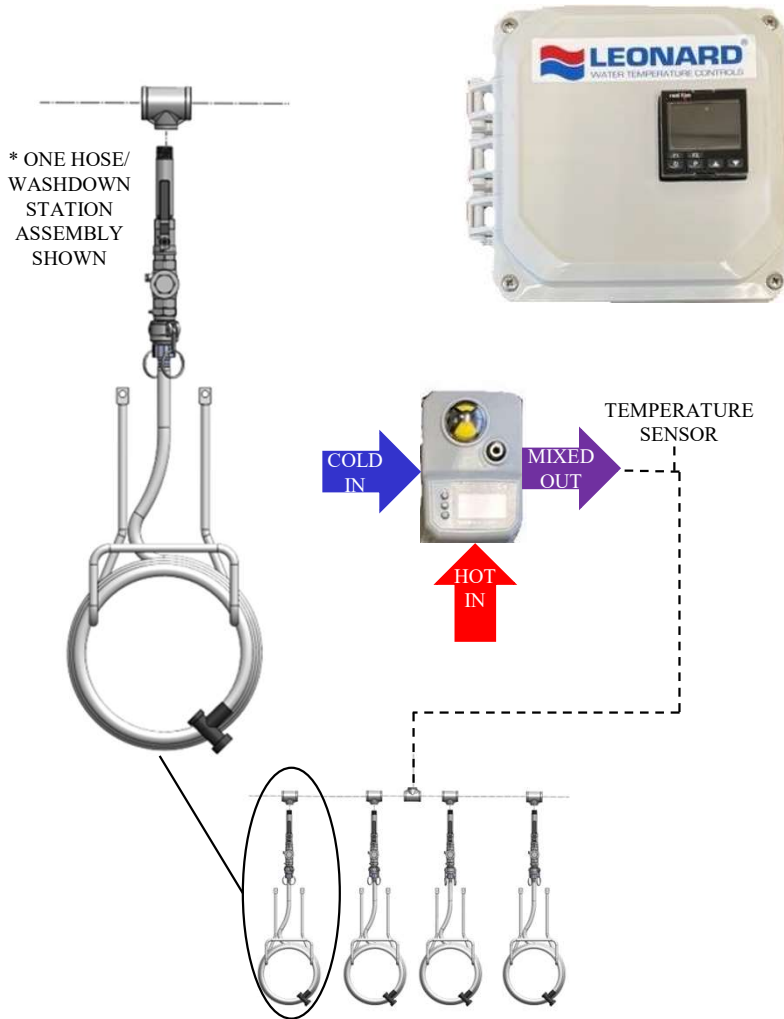


- Modular and buildable multiple hose/washdown station assemblies available from 1 to 4 units, including stainless piping with quick disconnects, 25' HDS Heavy Duty Hose, N2-SS stainless steel Hose Nozzle
- 3/4" individual station outlets (19mm Out)
- Controls water temperature to +/-2°F
- Programmable set point range 65°F to 180°F
- 316 Stainless steel
- For hot and cold water ONLY/ Not rated for steam
- Maximum operating pressure: 125 PSIG (862 KPA)
- Digital outlet temperature display
- Control box designed and manufactured with UL Listed components, supplied with 6' power cord

Models:

- ___ 1 Hose/washdown station, 3/4" inlet
- ___ 2 Hose/washdown station, 1" inlet
- ___ 3 Hose/washdown station, 1-1/4" inlet
- ___ 4 Hose/washdown station, 1-1/4" inlet

(see page 2 for layouts)

VALVE	PRESSURE DROP											
	MIN FLOW	5	10	15	20	25	30	35	40	45	50	PSI
		0.3	0.7	1	1.4	1.7	2.1	2.4	2.8	3.1	3.4	BAR
HCMS	5	18	24	28	32	36	39	42	45	48	52	GPM
	22	64	91	106	121	136	148	159	170	182	197	l/min

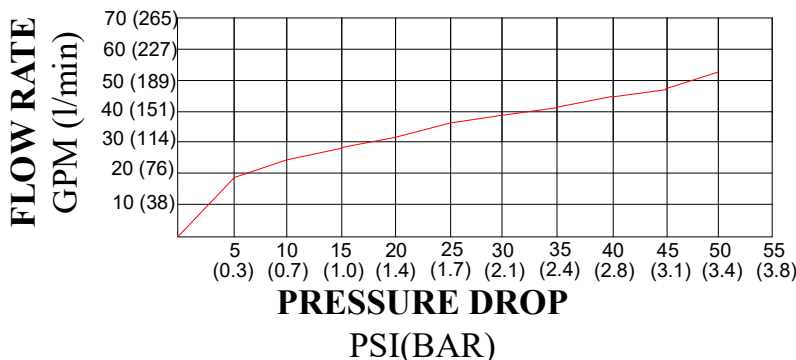

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov


NOTE: Leonard Valve Company reserves the right of product or design modification without notice or obligation




1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>

HCMS MODELS


HCMS-1

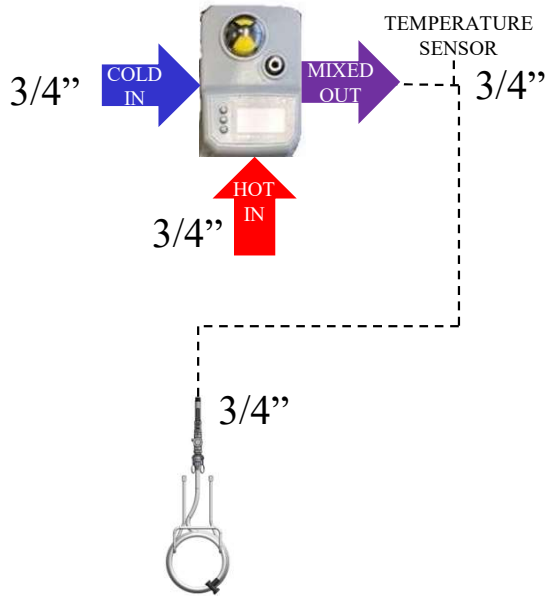


HCMS-2

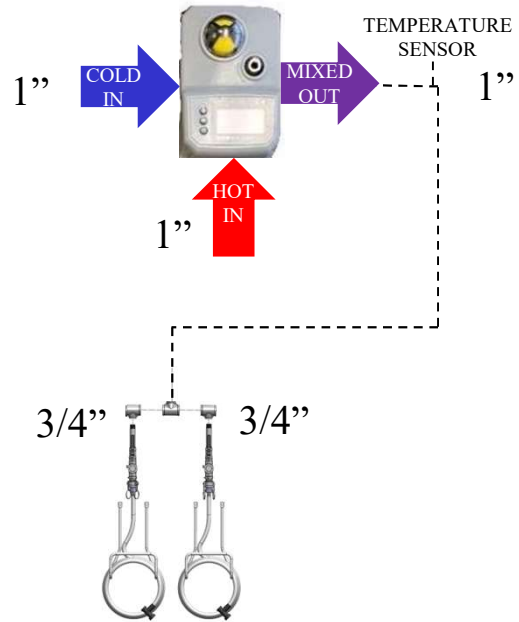

HCMS-3

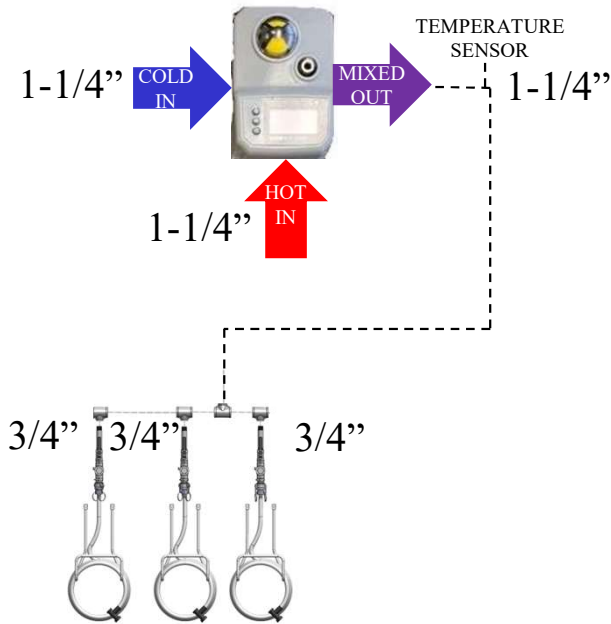

HCMS-4

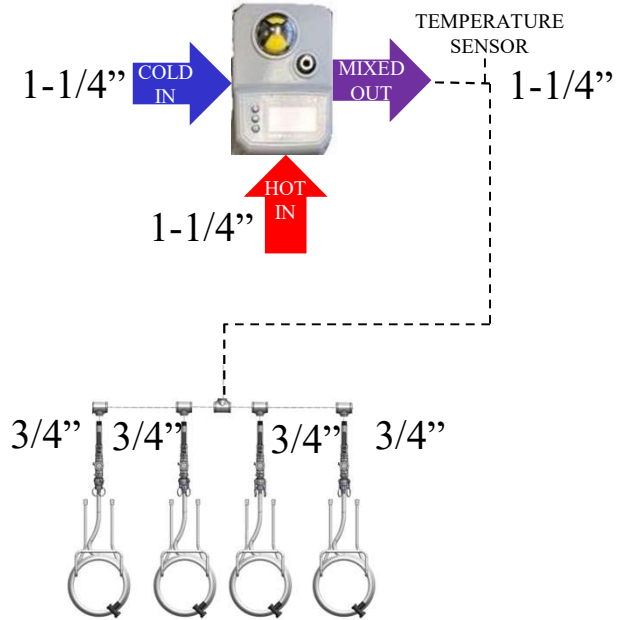

1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>

NOTE: Leonard Valve Company reserves the right of product or design modification without notice or obligation