

7600 Showermaster®

76-6A

1/2" inlets & outlet



CONCEALED PIPING

7600 Thermostatic Showermaster®

- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Cast wall flange and lever handle, polished chrome plated.
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Dial, Off through Hot, with directional indicators
- 1/2" inlets and outlet
- H-06 Institutional Shower head (2.5GPM, 9.5 l/min)



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov


VALVE IS ASSE 1016 TYPE T LISTED
VALVE IS CSA LISTED



Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____

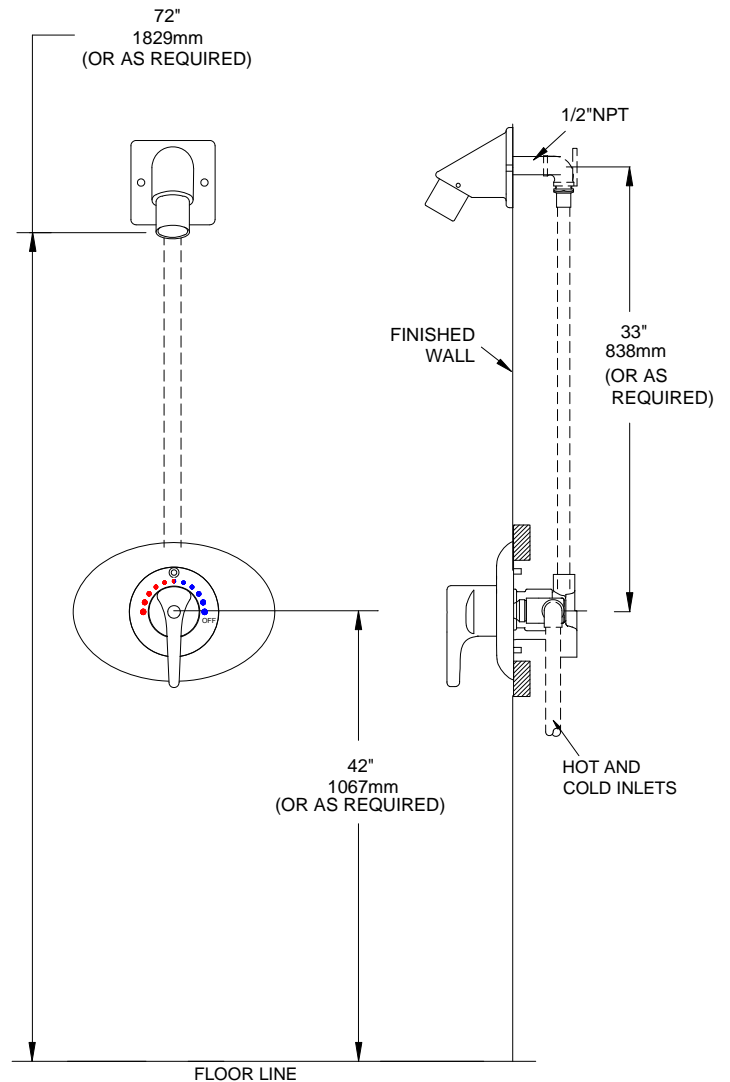

All Leonard Model 7600 Thermostatic Shower Valves have limitations. Please keep in mind that per the ASSE 1016-2011 Performance Standard, Harmonized along with ASME and CSA, it dictates inlet conditions of equal pressures, 45 PSI on both Hot and Cold Inlets, in addition to a Hot supply temperature range of 140 deg F-180 deg F. Significant deviations from those conditions stated above will alter performance expectations.