

WALL MOUNTED SHOWER SYSTEMS

surfashower®
FOR HANDICAPPED
INSTALLATION



Pressure actuated SS-PAM-101P(G) (Shown)



SS-PAM-101P(G)

VALVE IS ASSE LISTED

VALVE IS CSA LISTED



SS-PAM-101P(G) Pressure Actuated Surfashower®

- PAM®II Pressure Actuated Shower Mixer
- Stainless steel pressure balancing piston
- Built-in shutoff for single handle operation
- Maximum operating pressure: 125 PSI (860 KPA)
- Color-coded dial
- 101P(G) hand shower, 2.5 GPM (9.5 l/min) 60" (1524mm) hose, 24" (610mm) glide bar, double check valve assembly, supply elbow
- Integral checkstops
- Factory pre-assembled with 18 gauge stainless steel cover, #4 finish, with sloping top cap and regular bottom caps.
- 1/2" flexible stainless steel hose on inlets.

OPTIONS:

- ___ SUFFIX VX - Integral stainless steel extension to ceiling, specify length ____". See reverse side to calculate VX length
- ___ SUFFIX 115P(G) - Hand spray, 60" braided stainless steel flex hose 24" glide rail, double check valve backflow preventer, supply elbow and flange, operates at **1.50 GPM / 5.7 LPM**, below ASME, ANSI A112.18.1 standard at 2.5 GPM/ 9.5 LPM
- ___ SUFFIX 101P - Hand spray, 2.5 GPM/ 9.5 LPM, 60" braided stainless steel flex hose 24" slide bar, double check valve backflow preventer, supply elbow and flange
- ___ SUFFIX 115P - Same as above but **1.50 GPM / 5.7 LPM**, below ASME, ANSI A112.18.1
- ___ SUFFIX 100P - Hand spray, 60" chrome hose, double check valve backflow preventer, supply elbow and flange, 2 wall hooks, operates at 2.5 GPM/ 9.5 LPM
- ___ SUFFIX 105P - Same as above but **1.50 GPM / 5.7 LPM**, below ASME, ANSI A112.18.1

Leonard Valve Company reserves the right of product or design modifications without notice or obligation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Engineer's Approval

Job # _____

Arch/Eng. _____

Contractor _____

 **LEONARD**
WATER TEMPERATURE CONTROLS

1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310


Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>

WALL MOUNTED SHOWER SYSTEMS- Surfashower®

Pressure Actuated Model


* SS-PAM-101P(G)

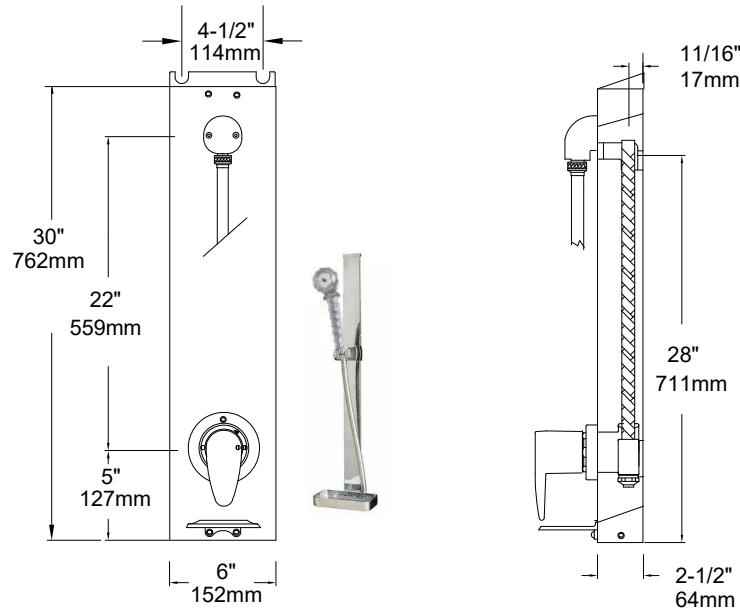

SUFFIX VX

VX LENGTH= Ceiling height minus shower

Valve height (38" (965mm) AFF min). minus 25"
(624mm)

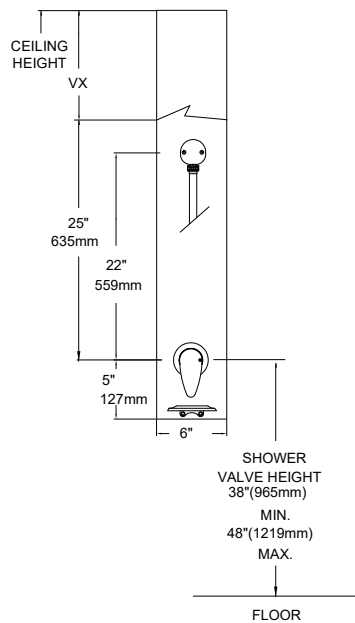

1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>