


DIGITAL ELECTRONIC EMERGENCY MIXING VALVE

ENV-6100-LF

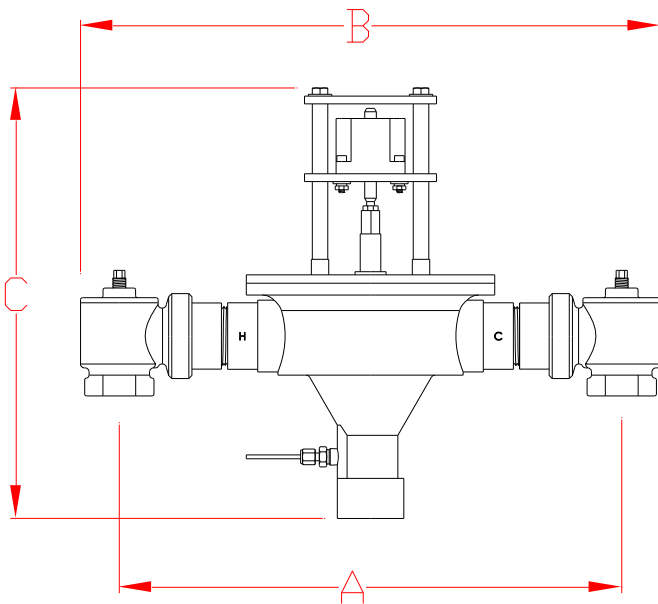


A = 17-1/2" ± 1" B = 20 ± 1"
C = 14" ± 1/2" Depth = 8" ± 1/2"

- Digital Electronic Emergency Mixing Valve
- 1-1/4" NPT inlets, 1-1/2" NPT outlet (32mm X 38mm)
- Valve controls at times of no use, 0.0 GPM**
- Maximum operating pressure: 125 PSIG (862 KPA)
- Controls water temperature to +/- 2°F in accordance with ASSE 1071
- Controls water temperature to +/- 2°F during times of low / no system demand
- Self-Balancing, do not need to adjust or balance recirculation
- Self-Cleaning, daily shuttle sweep keeps shuttle free of debris
- Automatic Hot Water shutoff upon cold water inlet supply failure
- Automatic cold water bypass of 40 GPM (in accordance with ASSE 1071) upon hot water inlet supply failure
- Alerts user when unit requires maintenance
- User programmable set point range between 65°F and 90°F, Displays outlet temperature
- Simple/intuitive user setup
- Reminder to test weekly as per ANSI Z358.1-2014 (ability to turn on / off)
- UL Listed control box and 120V plug in power supply with 6' cord
 - Option for Backup Uninterruptable Power Supply in the event of primary power loss w/ approx. two hours run time

****NOTE:** The valve will maintain temperature with 0.0 GPM flow from the emergency loop when properly installed near the hot water source with a continuously operating recirculation pump at minimum flow of 5 GPM.

OPTIONS:

____ **BPS** – Back-up Power Supply, uninterruptable power supply with up to 2 hours run time in case of primary power loss

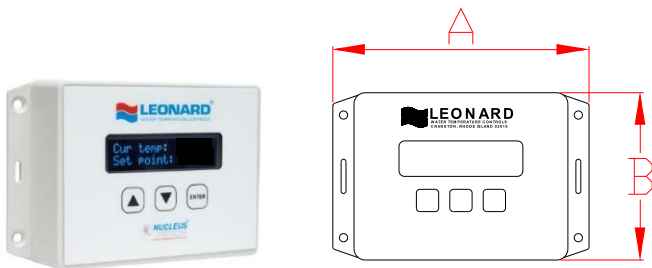

A = 6" B = 4"
Depth = 1-3/4"

ASSE 1071 Certified



CSA Certified



Valve electronics are UL Certified



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov




This product is certified to meet Low Lead requirements of wetted surface area containing less than 0.25% lead by weight

1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>

| MINIMUM FLOW | PRESSURE DROP | | | | | | | | | | |
|--------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|
| | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | PSI |
| | .3 | .7 | .97 | 1.4 | 1.7 | 2.1 | 2.4 | 2.8 | 3.1 | 3.4 | BAR |
| 3.0 | 30 | 40 | 47 | 52 | 57 | 60 | 66 | 71 | 76 | 80 | GPM |
| 11.4 | 114 | 151 | 178 | 197 | 216 | 227 | 250 | 269 | 288 | 303 | l/min |

HIGH TEMPERATURE FIXTURES (IF APPLICABLE)

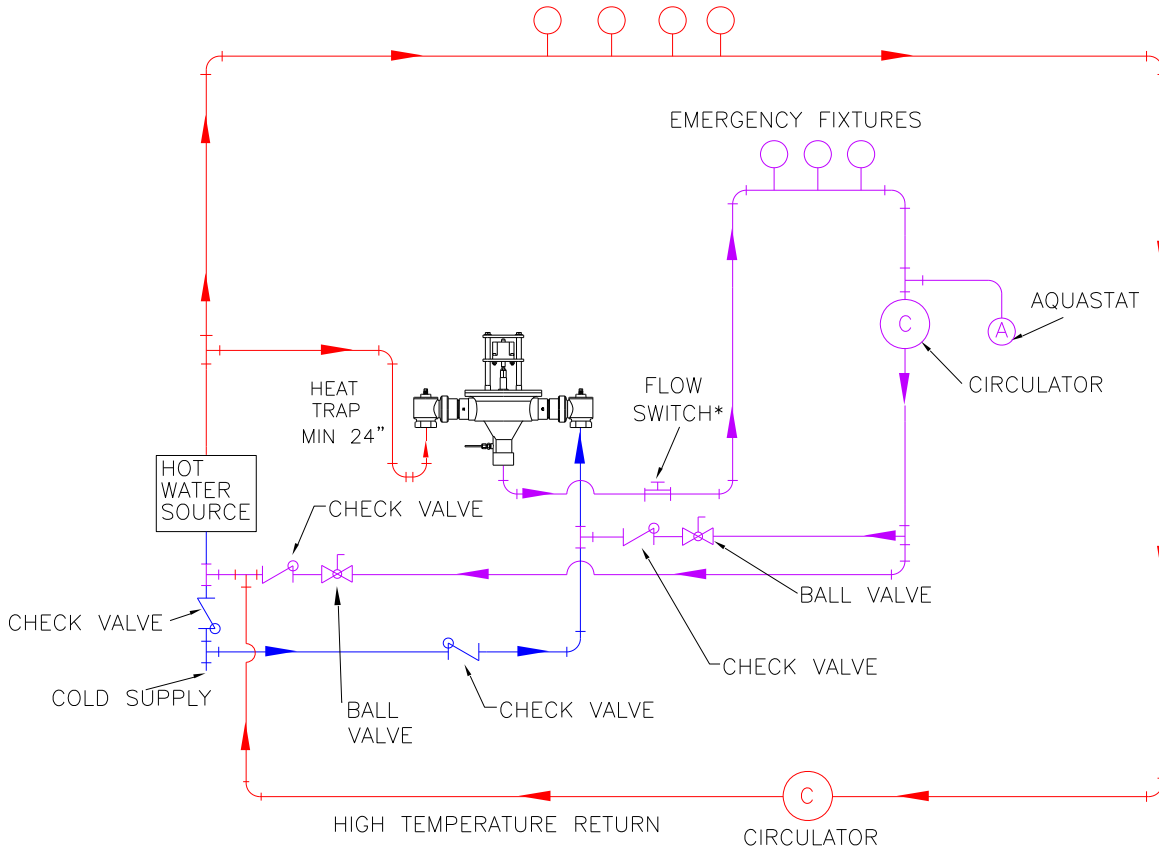

* FLOW SWITCH MUST BE LEVEL AND IN CORRECT DIRECTION

CAUTION! All thermostatic water mixing valves have limitations. They will NOT provide the desired accuracy outside of their flow capacity range. Consult the Flow Capacity Chart and DO NOT OVERSIZE. Minimum flow must be no less than as indicated.

NOTE: Flow rates will vary depending on existing field conditions. Leonard Valve Company always recommends using CASPAK® sizing software for proper valve sizing and model number applications.

Engineer's Approval

Job # _____
 Arch/Eng. _____
 Contractor _____

Note: The models shown represent Leonard Products which are believed to be equivalent in type and function to items specified. Leonard Valve Company is not responsible for errors or omissions due to differences in interpretations of information provided.

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.



1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>